

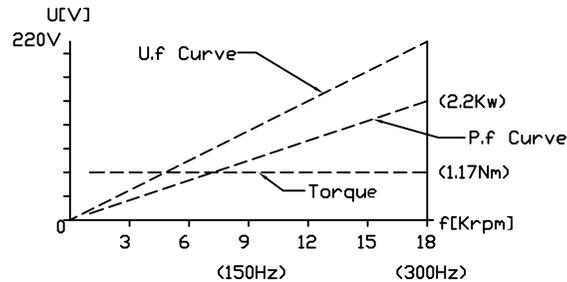




# GDF46-18Z/2.2

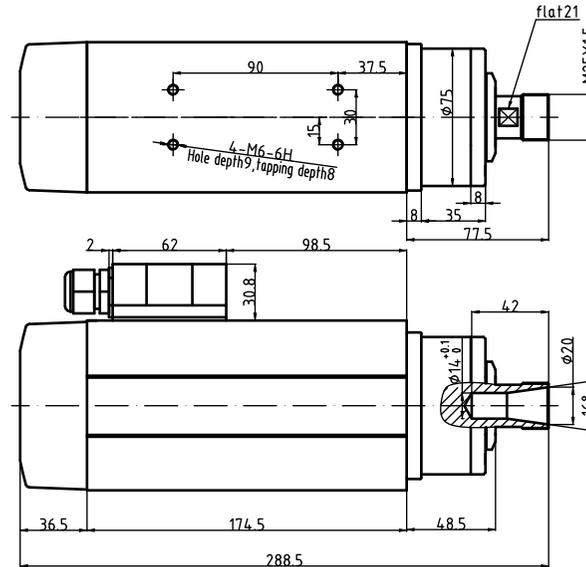

GDF46-18Z/2.2  
220V 7.8A 2P



TA:20°C Serv:S1 air cooling

GDF46-18Z/2.2  
Power 2.2kw  
Voltage 220V  
Current 7.8A  
Frequency 300Hz  
Rotational speed 18000r/min

Weight:7KG  
ER Nut: ER20  
Cooling method: Air cooling  
Lubrication method of bearings:grease lubrication  
Angular contact ball bearing with high precision:  
2X7005C P4/1X6002V P5  
Rotation direction:Counterclockwise viewed from the  
shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!

**HQD SPINDLE**  
www.han-qi.com