






# GDF46-18Z/3.5




GDF46-18Z/3.5 220V Profile drawing of junction box

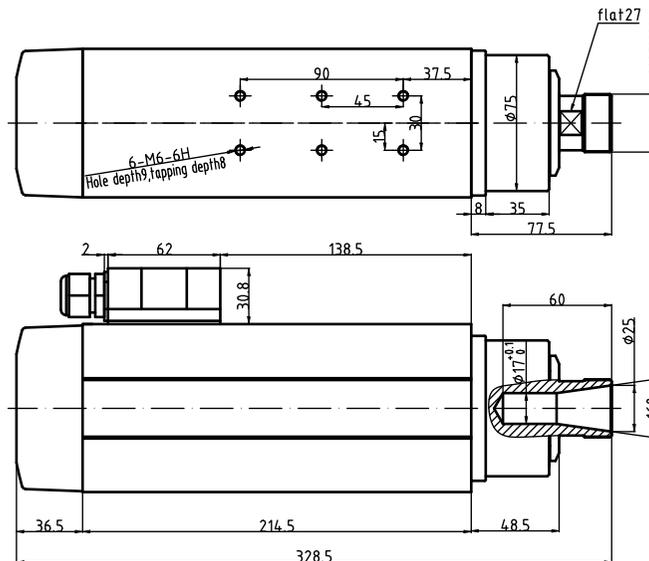

Wiring illustration

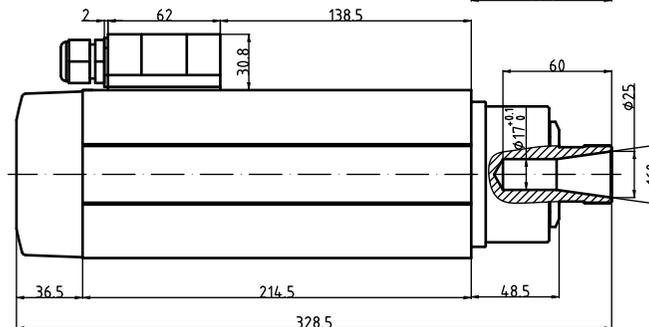

GDF46-18Z/3.5  
220V 12.0A 2P

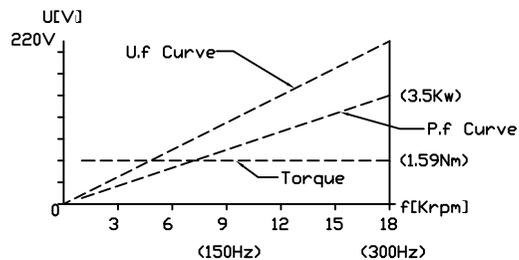

GDF46-18Z/3.5  
Power 3.5kw  
Voltage 220V  
Current 12.0A  
Frequency 300Hz  
Rotational speed 18000r/min

Weight:8KG  
ER Nut: ER25  
Cooling method: Air cooling  
Lubrication method of bearings:grease lubrication  
Angular contact ball bearing with high precision:  
2X7007C P4/2X7002C P4  
Rotation direction:Counterclockwise viewed from the shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!

TA:20°C Serv:S1 air cooling

**HQD SPINDLE**  
www.han-qi.com