



# GDF60-18Z/7.5

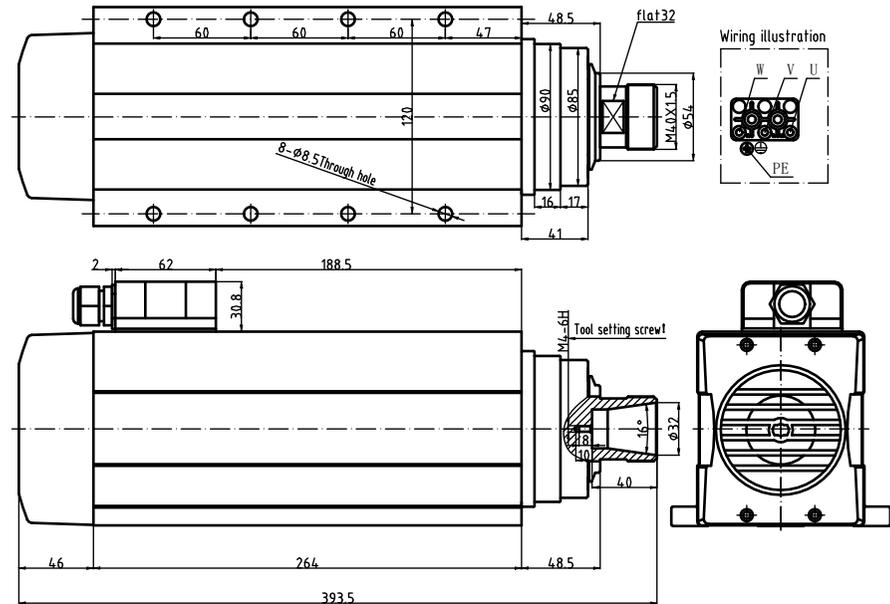

GDF60-18Z/7.5  
380V 15.0A 2P

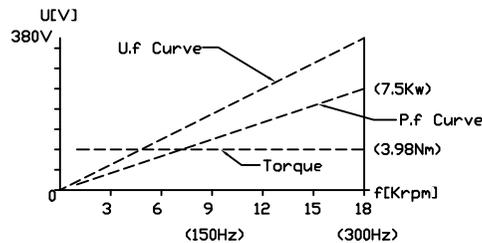

TA:20°C Serv:S1 air cooling

GDF60-18Z/7.5  
Power 7.5kw  
Voltage 380V  
Current 15.0A  
Frequency 300Hz  
Rotational speed 18000r/min

Weight:16KG  
ER Nut: ER32  
Cooling method: Air cooling  
Lubrication method of bearings:grease lubrication  
Angular contact ball bearing with high precision:  
2X7008C P4/2X7003C P4  
Rotation direction:Counterclockwise viewed from the shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!

**HQD SPINDLE**  
www.han-qi.com