



GDF53-18Z-3.5

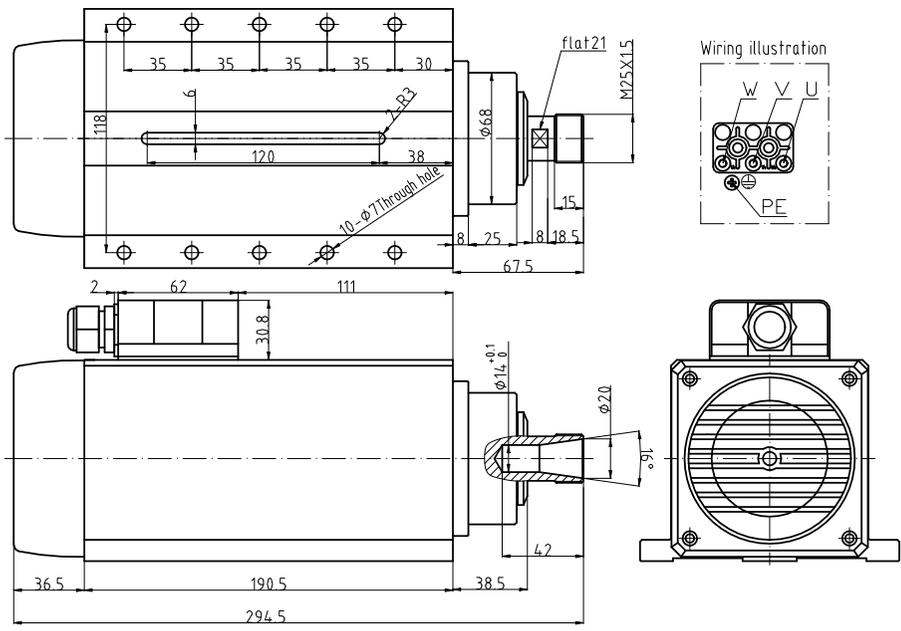

GDF53-18Z/3.5
 380V 7.8A 2P
 300Hz 18000rpm

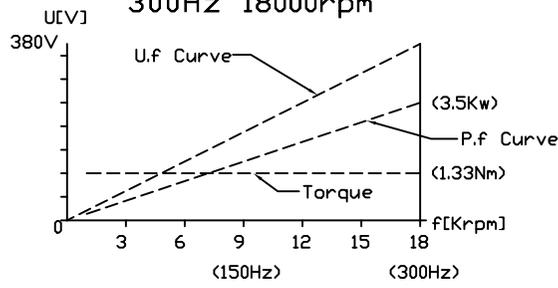

GDF53-18Z/3.5
 Power 3.5kw
 Voltage 380V
 Current 7.8A
 Frequency 300Hz
 Rotational speed 18000r/min

Weight:8KG
 ER Nut: ER20
 Cooling method: Air cooling
 Lubrication method of bearings:grease lubrication
 Angular contact ball bearing with high precision:
 2X7005C P4/2X7002C P4
 Rotation direction:Counterclockwise viewed from the
 shaft extension

Notice:It shall apply thread adhesive or spring washer to prevent loosening while mounting fastening screw!

TA:20°C Serv:S1 air cooling

HQD SPINDLE
www.han-qi.com